

JC07 Rec'd PCT/PTO 14 DEC 2001

FORM PTO-1390
(REV 10-94)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

DOCKET #: 4925-191PUS

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING
UNDER 35 U.S.C. 371**

U.S. APPLICATION NO.
(If known, see 37 CFR 1.5)**10/018226**INTERNATIONAL APPLICATION NO
PCT/FI00/00555INTERNATIONAL FILING DATE
21 June 2000PRIORITY DATE CLAIMED
21 June 1999

TITLE OF INVENTION

Call Setup Method

APPLICANT(S) FOR DO/EO/US

Mikko OLKKONEN, Jarmo HARNO

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau). (See Reply to Written Opinion)
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). **Unexecuted**
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. Below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information (*specify*): PCT Publication Sheet, Int'l Preliminary Examination Report, Written Opinion, Reply to Written Opinion, Int'l Search Report, PCT Request, PCT Demand

JC13 Rec'd PCT/PTO 14 DEC 2001

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/018226

INTERNATIONAL APPLICATION NO
PCT/FI00/00555ATTORNEY'S DOCKET NUMBER
4925-191PUS

17.[x]The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

Search Report has been prepared by the EPO or JPO\$890.00
 International preliminary examination fee paid to USPTO (37 CFR 1.482).....\$710.00
 No international preliminary examination fee paid to USPTO (37 CFR 1.482)
 but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$740.00
 Neither international preliminary examination fee (37 CFR 1.482)
 nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1040.00
 International preliminary examination fee paid to USPTO (37 CFR 1.482)
 and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 890

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months
 from the earliest claimed priority date (37 CFR 1.492(e)).

\$

Claims

Number Filed

Number Extra

Rate

Total Claims

19 - 20 =

x \$18.00

\$

Independent Claims

2 - 3 =

x \$84.00

\$

Multiple dependent claim(s) (if applicable)

+ \$280.00

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 890

Reduction of 1/2 for filing by small entity, if applicable.

\$

SUBTOTAL =

\$ 890

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
 months from the earliest claimed priority date (37 CFR 1.492(f)).

+

\$

TOTAL NATIONAL FEE =

\$ 890

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
 accompanied by the appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property
 +

\$

TOTAL FEES ENCLOSED \$890

Amount to be refunded:

\$

charged:

\$

a. [x] One check in the amount of \$ 890 to cover the above fee is enclosed.

b. ☐ Please charge my Deposit Account No. 03-2412 in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. [x] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 03-2412. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive
 (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

Michael C. Stuart

Cohen, Pontani, Lieberman & Pavane

551 Fifth Avenue, Suite 1210

New York, New York 10176

Michael C. Stuart

Registration Number: 35,698 December 14, 2001

Tel: (212) 687-2770

Call setup method

TECHNICAL FIELD OF THE INVENTION

5 The invention concerns transmission of calls in an environment, where both a fixed telephone network and a packet data network are used for transmission of a call. The invention is directed to a method according to the preamble of the first independent claim.

BACKGROUND OF THE INVENTION

10 In conventional telephony, a basic channel format is the 64 kbit/s channel, in which a single speech connection is transmitted. The 64 kbit/s channel transmits 8000 samples per seconds, each sample having 8 bits. Typically, a plurality of 64 kbit/s channels are transmitted in a single transmission line to form 1544 kbit/s, 2048 kbit/s, and higher transmission rates. In a 2048 kbit/s transmission link, a 256 bit i.e. 32 byte frame is transmitted 8000 times per second. The 32 groups of 8 bits, i.e. 15 bytes of the frame are referred to as time slots. The terms PCM transmission line and trunk line are commonly used to refer to a communication link transmitting a plurality of 64 kbit/s channels. Therefore, to identify a certain speech channel transmitted within a group of trunk lines, one needs to indicate the time slot number of the channel and a trunk line identifier. The term trunk line is sometimes used also to 20 denote a basic 1544 kbit/s or 2048 kbit/s unit of transmission even in a case, when a plurality of such transmission units are transmitted in a single physical transmission medium i.e. in a single physical transmission line. Although the acronym PCM strictly considered denotes pulse code modulation, which is typically used in trunk lines, the term PCM transmission line is generally used by a person skilled in the art and specifically in this specification to refer to aforementioned logical group of 25 channels or a group of groups of channels and not to a specific modulation method.

Further, packet based transmission networks are presently in widespread use, a prominent example being the Internet. A common packet transmission protocol is the Internet Protocol (IP). The IP protocol version 4 is described in detail in the 30 specification RFC 791. The next version of the IP protocol, known as IPv6, is described in the specification RFC 1883.

The increasing importance and use of telecommunication drives toward inter-connection of different types of networks. For example, the Internet is already used

for transmitting voice using so called internet telephony. As the data transmission capacity of the Internet increases, the use of Internet as a replacement of conventional telephones will become common. Some telephone operators already provide long distance calls via the Internet with a reduced rate.

- 5 Publication WO 9914929 discloses method and apparatus for placing long distance telephone calls via a packet data network and local telephone calls via local telephone network, the user of the telephone set plainly dialling the desired destination number. The routing of the call via either packet data network or telephone network is based on the destination number.

10

Publication WO 9904540 discloses a system for establishing communication between two endpoints connected to each other via two communication media, for example Ethernet and ATM (Asynchronous Transfer Mode), operating in accordance with different communication protocols. A connection controller selects a connection path connecting the two endpoints and configures the endpoints and an interface between the two communication media to establish a connection before any data is sent using the connection path.

15

- Publication WO 9716007 discloses a telecommunication system, where it is possible to transmit calls between terminals using a packet switched network or a packet switched network and telephone network. There is a gateway connecting a packet switched network to telephone network. A first connection is typically set up between a first terminal and the gateway via, for example, the packet switched network and a second connection is set up between a second terminal and the gateway via the telephone network.

20

25

2a

Figure 1 illustrates one possible arrangement for transmission of speech using an IP network together with a telephone network. Figure 1 shows switching elements 10a, 10b, 10c of the telephone network being connected to each other with PCM communication links 12. Further, figure 1 shows an IP network 40, and routers 30 connected to the IP network. Network elements such as IP gateways 20 connect the switching elements 10a, 10b, 10c to the routers 30. Without using the IP network, speech data from a first party PARTY A of a connection to a second party PARTY B is transferred using the PCM connections 12. The call may pass through a large number of switching elements, depending on the geographical distance spanned by the call. When the IP network 40, such as the Internet network is used, a switching element directs the speech data to an IP gateway instead of another switching element, and the IP gateway sends the speech data through the IP network to distant IP gateway connected to a distant switch element. The distant IP gateway converts the received IP packets to a speech data stream and forwards the data stream to the distant switch element for further processing. One or more legs of a call may be routed in such a way through an IP network.

One example of the proceeding of call setup according to prior art is illustrated in figure 2. Figure 2 shows the local telephone exchange 5 of a calling party PARTY A and switching elements 10a, 10b, 10c of the telephone network. First, the calling party initiates the call, whereby the local telephone exchange sends 100 an ISUP SETUP message to the next switching element 10a. The switching element 10a performs digit analysis 105 to determine, where the call should be directed. In this example, the digit analysis reveals, that the next switching element SW B 10b is an IP capable switch. As a consequence, switching element SW A 10a sends an ISUP SETUP message 110 to switching element SW B 10b. The switching element SW A 10a may include in the message an indication that it wishes to set up an IP connection, for example as a parameter specifying an IP address corresponding to the IP gateway of switch element SW A. The switching element SW B 10b responds by sending 115 a message such as a CHANNEL INFO message specifying an IP address corresponding to the IP gateway connected to switch element SW B. After receiving the IP address, switching element SW A may start sending 120 speech data to switching element B via the IP gateways and the IP network. After sending

the CHANNEL INFO message, the switching element SW B performs digit analysis 125 to determine, where it should direct the call. In this example, the digit analysis reveals that the next switching element is switching element SW C 10c, and that SW C is IP capable. As a consequence, switching element SW B 10b sends an ISUP
5 SETUP message 130 to switching element SW C 10c. The switching element SW B 10b may include in the message an indication that it wishes to set up an IP connection, for example as a parameter specifying an IP address corresponding to the IP gateway of switch element SW B. The switching element SW C 10c responds by sending 135 a message such as a CHANNEL INFO message specifying an IP
10 address corresponding to the IP gateway connected to switch element SW C. After receiving the IP address, switching element SW B may start sending 140 speech data to switching element C via the IP gateways and the IP network.

The resulting situation is not optimal regarding the efficiency of data transfer: switching element SW B receives a speech data stream from the IP network, and
15 returns the speech data stream back to the network for forwarding to switching element SW C.

The same situation may occur also in a cellular telecommunication network, in which case the switching elements 10a, 10b, 10c are switching elements of a cellular telecommunications network, such as mobile services switching centers (MSC) of a
20 GSM (Global System for Mobile communications) or a UMTS (Universal Mobile Telecommunication System) network. In a cellular telecommunication network such a situation may also occur as a result of a inter MSC handover, for example when a mobile station (MS) under control of MSC SW B moves to an area under control of MSC SW C, while having a connection to a mobile station under control of MSC
25 SW A.

SUMMARY OF THE INVENTION

An object of the invention is to realize a method, which alleviates the problems associated with prior art. A further object of the invention is to realize such a method with minimal changes to existing protocols.

30 The objects are reached by arranging a switching element to monitor the connections, and initiate a connection release procedure, when it observes that both the incoming and outgoing leg of a connection are transmitted via a packet data network. The switching element also indicates to the originating switching element

of the incoming leg the packet data address corresponding to the receiving switching element of the outgoing leg

5 The method according to the invention is characterized by that, which is specified in the characterizing part of the independent method claim. The switching network element according to the invention is characterized by that, which is specified in the characterizing part of the independent claim directed to a switching network element. The dependent claims describe further advantageous embodiments of the invention.

10 The invention is applicable in situations, when a second network, i.e. a packet data network is used in combination with a circuit switched telephone network, such as a conventional telephone network or a cellular telephone network. According to the invention, a network element of the telephone network which receives data from an incoming leg of a connection and forwards the data to an outgoing leg of a connection monitors its connections, and when it observes that both the incoming
15 and the outgoing legs of a connection are transmitted via a packet data network to the previous or correspondingly the next network element of the telephone network, it releases the connection to the previous network element of the telephone network and indicates a packet network address corresponding to the next telephone network element, after which the previous telephone network element may transmit data via
20 the packet data network directly to the next telephone network element.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is described in more detail in the following with reference to the accompanying drawings, of which

25 Figure 1 illustrates transmission of data using both PCM transmission lines and a packet data network,

Figure 2 illustrates a signalling sequence for setting up connections according to prior art,

Figure 3 illustrates a signalling sequence for setting up connections according to an advantageous embodiment of the invention,

30 Figure 4 shows a flow chart of an advantageous embodiment of the invention, and

Figure 5 illustrates an advantageous embodiment of the invention applied in a GSM system.

Same reference numerals are used for similar entities in the figures.

DETAILED DESCRIPTION

Figure 3 illustrates call setup signalling according to an advantageous embodiment of the invention.

- 5 Figure 3 shows the local telephone exchange 5 of a calling party PARTY A and switching elements 10a, 10b, 10c of the telephone network. First, the calling party initiates the call, whereby the local telephone exchange sends 100 an ISUP SETUP message to the next switching element 10a. The switching element 10a performs digit analysis 105 to determine, where the call should be directed. In this example, the digit analysis reveals, that the next switching element SW B 10b is an IP capable switch. As a consequence, switching element SW A 10a sends an ISUP SETUP message 110 to switching element SW B 10b. The switching element SW A 10a may include in the message an indication that it wishes to set up an IP connection, for example as a parameter specifying an IP address corresponding to the IP gateway of switch element SW A. The switching element SW B 10b responds by sending 115 a message such as a CHANNEL INFO message specifying an IP address corresponding to the IP gateway connected to switch element SW B. After receiving the IP address, switching element SW A may start sending 120 speech data to switching element B via the IP gateways and the IP network. After sending the CHANNEL INFO message, the switching element SW B performs digit analysis 125 to determine, where it should direct the call. In this example, the digit analysis reveals that the next switching element is switching element SW C 10c, and that SW C is IP capable. As a consequence, switching element SW B 10b sends an ISUP SETUP message 130 to switching element SW C 10c. The switching element SW B 10b may include in the message an indication that it wishes to set up an IP connection, for example as a parameter specifying an IP address corresponding to the IP gateway of switch element SW B. The switching element SW C 10c responds by sending 135 a message such as a CHANNEL INFO message specifying an IP address corresponding to the IP gateway connected to switch element SW C. After receiving the IP address, switching element SW B may start sending 140 speech data to switching element C via the IP gateways and the IP network.

- In the next step 200, switching element SW B examines, whether both legs SW A to SW B and SW B to SW C are transmitted via the IP network. In this example, both legs are transmitted via the packet network. As a consequence, the switching element SW B sends 210 an ISUP RELEASE message to switching element SW A,

indicating an IP address corresponding to switching element SW C for example as a parameter attached to the ISUP RELEASE message. After receiving the ISUP RELEASE message, the switching element SW A changes 220 the destination address of the data stream sent to the IP network from an address corresponding to SW B to the address corresponding to SW C, and sends 230 a connection release acknowledgment message RELEASE ACK back to SW B. The switching element SW A may perform the changing of the destination address for example by signalling to the IP gateway connected to it that the new destination address of data packets of the call. After receiving the release acknowledgment message, switching element SW B releases the connection from its switch matrix. After sending the release acknowledgment message, SW A may start sending 250 data directly to C via the IP network.

The example of figure 3 shows that an ISUP RELEASE message can be used in an embodiment of the invention. However, the invention is not limited to use with the specifically named examples of various messages stated in this patent application. For example, also other call control release messages than the ISUP RELEASE message can be used in various embodiments of the invention.

In a further advantageous embodiment of the invention, the switching element SW B indicates an address corresponding to SW A to the switching element SW C, after which the switching element SW C may arrange the release of the route via SW A. Such an embodiment of the invention is advantageous, if the connection is a two-directional connection or has an associated connection in the other direction through the same route. In such a case it is not practically important, to which of switches SW A and SW C the indication of the address of the other switch is transmitted by SW B.

Figure 4 shows a flow chart of a method according to an advantageous embodiment of the invention. The example of figure 4 illustrates an example of the functioning of switching network element SW B in figure 3.

In the first step 305, the switching network element examines a connection transmitted through the switching network element. More precisely, the switching network element examines 305, if both legs to either direction from the network element are transmitted via a packet data network such as an IP network. If both legs are not found to be transmitted via a packet network in step 310, the next connection is taken into consideration in step 315, whereafter the method continues at step 305. If both legs are transmitted via the same packet data network, the

method is continued at step 320. The switching network element indicates a packet network address such as an IP address corresponding to the NE at the receiving end of the outgoing leg of the connection to the NE at the originating end of the incoming leg of the connection. Next, the switching network element releases
5 the connection from its switching matrix. If all connections are found to be already considered at step 330, the method is ended, otherwise the next connection is taken into consideration at step 315.

In a further advantageous embodiment of the invention, the step 230 of indicating the IP address also comprises sending a connection release message to the NE at the
10 originating end of the incoming leg of the connection, and waiting for an acknowledgment message before proceeding to step 325. Preferably, the indication of the IP address is added as a parameter attached to a ISUP RELEASE message.

In a still further advantageous embodiment of the invention the network element i.e. network element SW B of figure 3 indicates to the NE at the receiving end of the
15 outgoing leg of the connection, that data will be sent directly from the NE at the originating end of the incoming leg of the connection, i.e. from SW A of figure 3, to the NE at the receiving end of the connection, i.e. to SW C of figure 3.

The invention can be used in many different cellular telecommunication systems, such as the GSM or the UMTS systems. For example, if the embodiment of figure 3
20 is applied in a GSM system, the switching network elements are MSC's (mobile services switching center) of the GSM system. Figure 5 describes such an embodiment of the invention. Figure 5 shows MSC's 400, 400b, and 400c, a base station controller (BSC) 402, base stations (BS) 404, and mobile communication means 406. Figure 5 further shows packet network gateways 20 connected to the
25 MSC's, and routers 30 connected to a packet data network 40 and the gateways 20. The MSC's 400, 400b, and 400c are connected by circuit switched data links 12 such as PCM links 12. In this exemplary embodiment of the invention, a switching network element 400, 400b, 400c comprises at least

- means 453 for examining the incoming and outgoing legs of connections and for
30 producing an output if both said legs of a connection are transmitted via a packet data network instead of a circuit-switched connection,
- means 454 for indicating a packet data network address corresponding to one of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg to the other
35 of the switching network element at the receiving end of said outgoing leg and the

switching network element at the originating end of said incoming leg as a response to said output, and

- means 455 for sending a connection release message as a response to said output to said one of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg.

Advantageously said one of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg is the switching network element at the receiving end of said outgoing leg; and said other of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg is the switching network element at the originating end of said incoming leg.

Figure 5 also shows a processing unit 450 and a memory unit 452 of a switching network element 400. The means 453, 454, and 455 are advantageously realized using software programs stored in the memory unit 452 and executed by a micro-processor of the control unit 450.

The invention can be used in fixed telephony networks as well in cases, in which a packet network is used for transmission of a connection for a part of the route. Generally, the switching elements of the invention are circuit switched type switching elements which can use packet connections for transmission of circuit switched data.

The previous examples describe the treatment of connections in general. However, in some systems it may be advantageous to separate control of a connection and the transfer of the actual data from each other. In such a case, two connections are actually formed for transferring a single stream of data: a control connection and user data connection. The control connection is created by the data transfer system for controlling the data flow in the user data connection, which transfers the actual payload data. The control connection is consequently a very low-volume connection, since it transfers only control signalling. In an advantageous embodiment of the invention, only the user data connection is led through a packet data network as described previously, and the control connection is retained within the circuit switched network. For example, if such an embodiment is realized using signalling according to figure 3, only the user data connection is controlled and directed according to figure 3, but the control connection continues to go via switching network elements SW A, SW B, and SW C. Such an arrangement may be

advantageous in terms of ease of control of connections, and allows all control functions of the circuit switched network such as billing to be used despite the use of a packet data network as a part of the data transfer route.

5 The term user data connection in the attached patent claims therefore covers the user data connection in such systems, in which user data connections and control connections are separate. Further, the term user data connection covers the transmitted connection in systems, in which there is no separation between the payload and control aspects of a connection. Further, the user data connection can transfer speech data, images, video data, fax data, or any other type of data transferred in a
10 circuit switched connection.

In this specification and in the attached patent claims, the term leg of a connection refers to a part of a connection from one switching element of a telephone network to another.

15 The IP addresses used in various embodiments of the invention may be IPv4 addresses described in detail in the specification RFC 791, or IPv6 addresses described in the specification RFC-1883. The invention can be used with both IP version 4 and IP version 6 networks, as well as other packet data networks.

20 The name of a given functional entity, such as the base station controller, is often different in the context of different cellular telecommunication systems. For example, in the UMTS (Universal Mobile Telecommunication System) system the functional entity corresponding to a base station controller (BSC) is the radio network controller (RNC). Therefore, the particular terminology used to denote various functional entities in this specification are only examples according to the GSM system, and do not limit the invention in any way. Further, the various
25 command and message names such as the CHANNEL INFO message name are intended to be examples only, and the invention is not limited to using the command and message names recited in this specification.

30 In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. While a preferred embodiment of the invention has been described in detail, it should be apparent that many modifications and variations thereto are possible, all of which fall within the true spirit and scope of the invention as defined in the appended claims.

Claims

1. Method for optimizing data transmission in a telephone network, **characterized** in that the method comprises at least steps, in which
- 5 - a first switching network element (10b) examines (200, 305, 310), if the incoming leg of a user data connection is transmitted from a second switching network element (10a) via a packet data network and if the outgoing leg of the same user data connection is transmitted to a third switching network element (10c) via said packet data network,
- 10 - if both the incoming and the outgoing legs are transmitted via said packet data network, said first switching network element indicates (210, 320) to one of said second and third switching network elements an address of said packet data network corresponding to the other of said second and third switching network elements.
2. A method according to claim 1, **characterized** in that the method further comprises a step, in which said first switching network element releases (240, 325)
- 15 the user data connection between said first switching network element and said one of said second and third switching network elements.
3. A method according to claim 1, **characterized** in that said one of said second and third switching network elements is said second switching network element and
- 20 said other of said second and third switching network elements is said third switching network element.
4. A method according to claim 1, **characterized** in that said packet data network is an IP network and said address of said packet data network is an IP address.
5. A method according to claim 4, **characterized** in that said address of said
- 25 packet data network is an IPv4 address according to RFC 791.
6. A method according to claim 4, **characterized** in that said address of said packet data network is an IPv6 address according to RFC 1883.
7. A method according to claim 1, **characterized** in that said address corresponding to said one of said second and third switching network elements is
- 30 indicated to said other of said second and third switching network elements switching element using (210) a call control release message.

8. A method according to claim 7, **characterized** in that said indication is attached (210) to a ISUP RELEASE message.

9. A method according to claim 1, **characterized** in that said connection is a speech data connection.

5 10. A method according to claim 1, **characterized** in that said switching network element is a network element of a cellular telecommunications network.

11. A method according to claim 1, **characterized** in that said switching network element is a MSC of a cellular telecommunications network.

10 12. A method according to claim 11, **characterized** in that said switching network element is a MSC of a GSM network.

13. A method according to claim 11, **characterized** in that said switching network element is a MSC of a UMTS network.

14. A switching network element (400) of a telephone network, **characterized in that the network element comprises at least**

15 - means (453) for examining the incoming and outgoing legs of connections and for producing an output if both said legs of a connection are transmitted via a packet data network instead of a circuit-switched connection,

20 - means (454) for indicating a packet data network address corresponding to one of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg to the other of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg as a response to said output, and

25 - means (455) for sending a connection release message as a response to said output to said one of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg.

30 15. A switching network element according to claim 14, **characterized** in that said one of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg is the switching network element at the receiving end of said outgoing leg; and said other of the switching network element at the receiving end of said outgoing leg and the switching network element at the originating end of said incoming leg is the switching network element at the originating end of said incoming leg.

16. A switching network element according to claim 14, **characterized** in that the switching network element is a network element of a cellular telecommunications network.
- 5 17. A switching network element according to claim 14, **characterized** in that the switching network element is a MSC of a cellular telephone network.
18. A switching network element according to claim 14, **characterized** in that the switching network element is a MSC of a GSM network.
19. A switching network element according to claim 14, **characterized** in that the switching network element is a MSC of a UMTS network.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)


PCT

(10) International Publication Number
WO 00/79743 A1

- (51) International Patent Classification⁷: H04L 12/66, H04M 3/42
- (21) International Application Number: PCT/FI00/00555
- (22) International Filing Date: 21 June 2000 (21.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
991413 21 June 1999 (21.06.1999) FI
- (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): OLKKONEN, Mikko [FI/FI]; Tähtelänpolku 3, FIN-10210 Inkoo (FI). HARNO, Jarmo [FI/FI]; Hiidenportti 12 B, FIN-02750 Espoo (FI).
- (74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: CALL SETUP METHOD

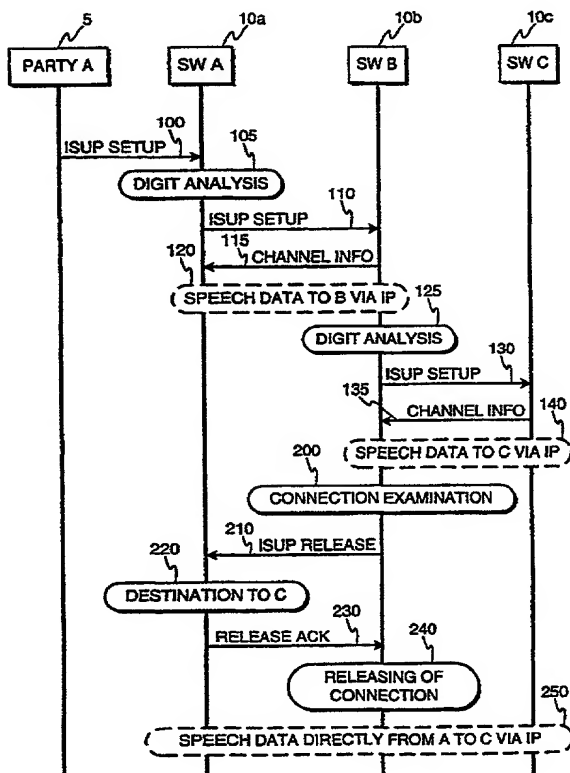

(57) Abstract: The invention concerns transmission of calls in an environment, where both a fixed telephone network and a packet data network are used for transmission of a call. The invention is applicable in situations, when a second network, i.e. a packet data network is used in combination with a circuit switched telephone network, such as a conventional telephone network or a cellular telephone network. According to the invention, a network element of the telephone network which receives data from an incoming leg of a connection and forwards the data to an outgoing leg of a connection monitors its connections, and when it observes that both the incoming and the outgoing legs of a connection are transmitted via a packet data network to the previous or correspondingly the next network element of the telephone network, it releases the connection to the previous network element of the telephone network and indicates a packet network address corresponding to the next telephone network element, after which the previous telephone network element may transmit data via the packet data network directly to the next telephone network element.

1 / 4

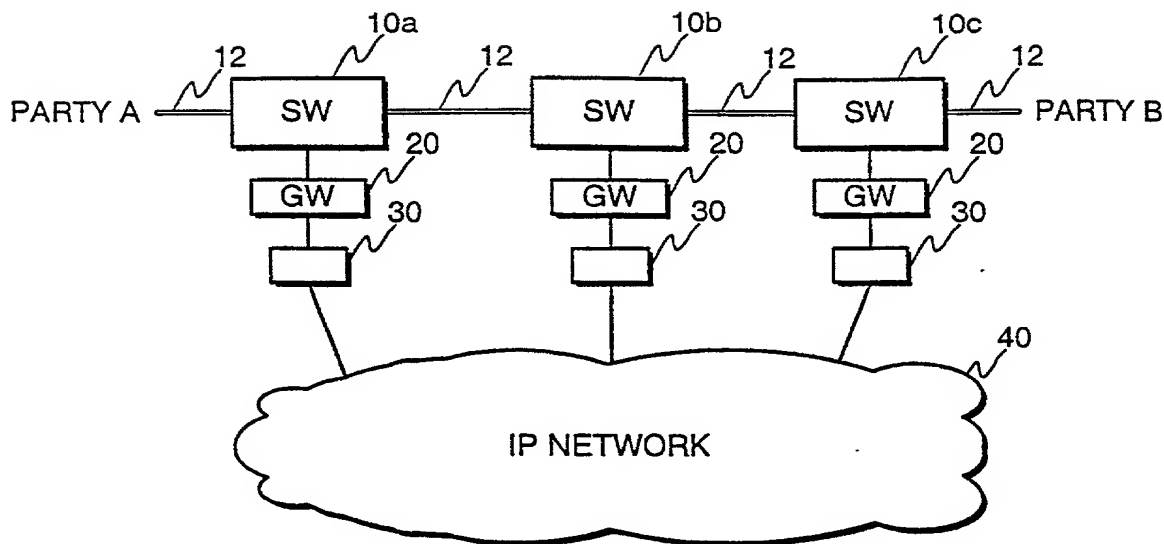


Fig. 1

PRIOR ART

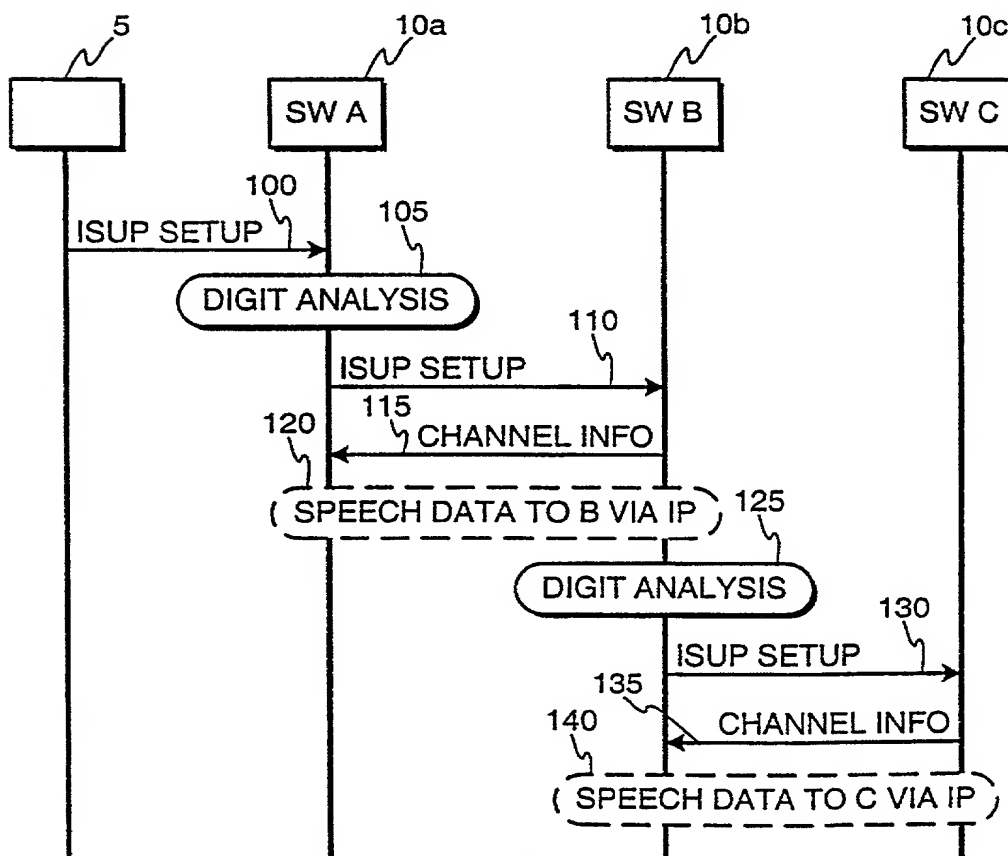


Fig. 2

PRIOR ART

2 / 4

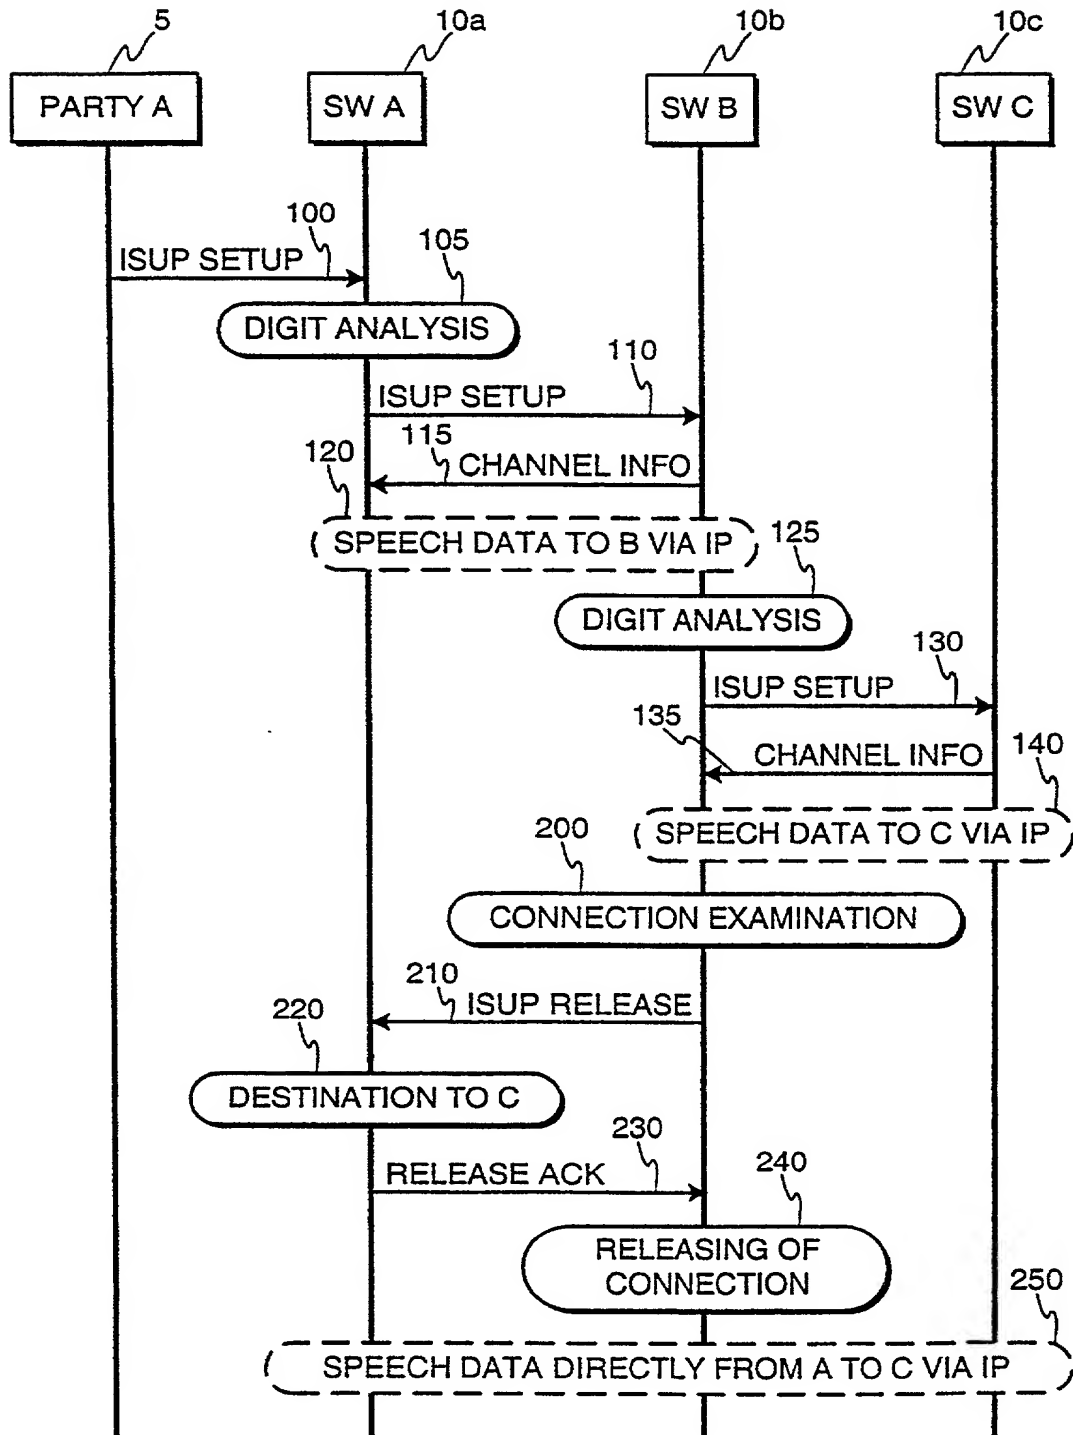
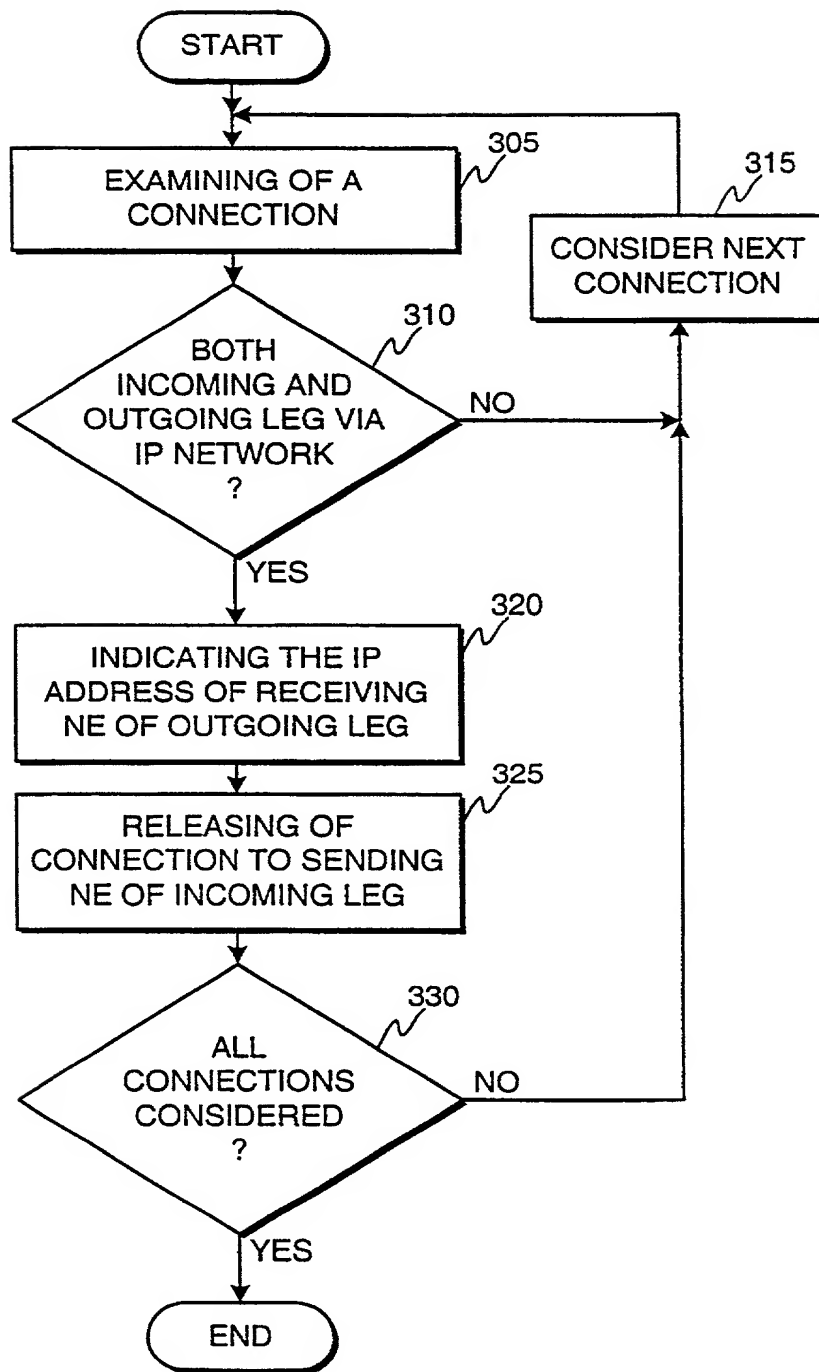


Fig. 3

3 / 4

**Fig. 4**

4 / 4

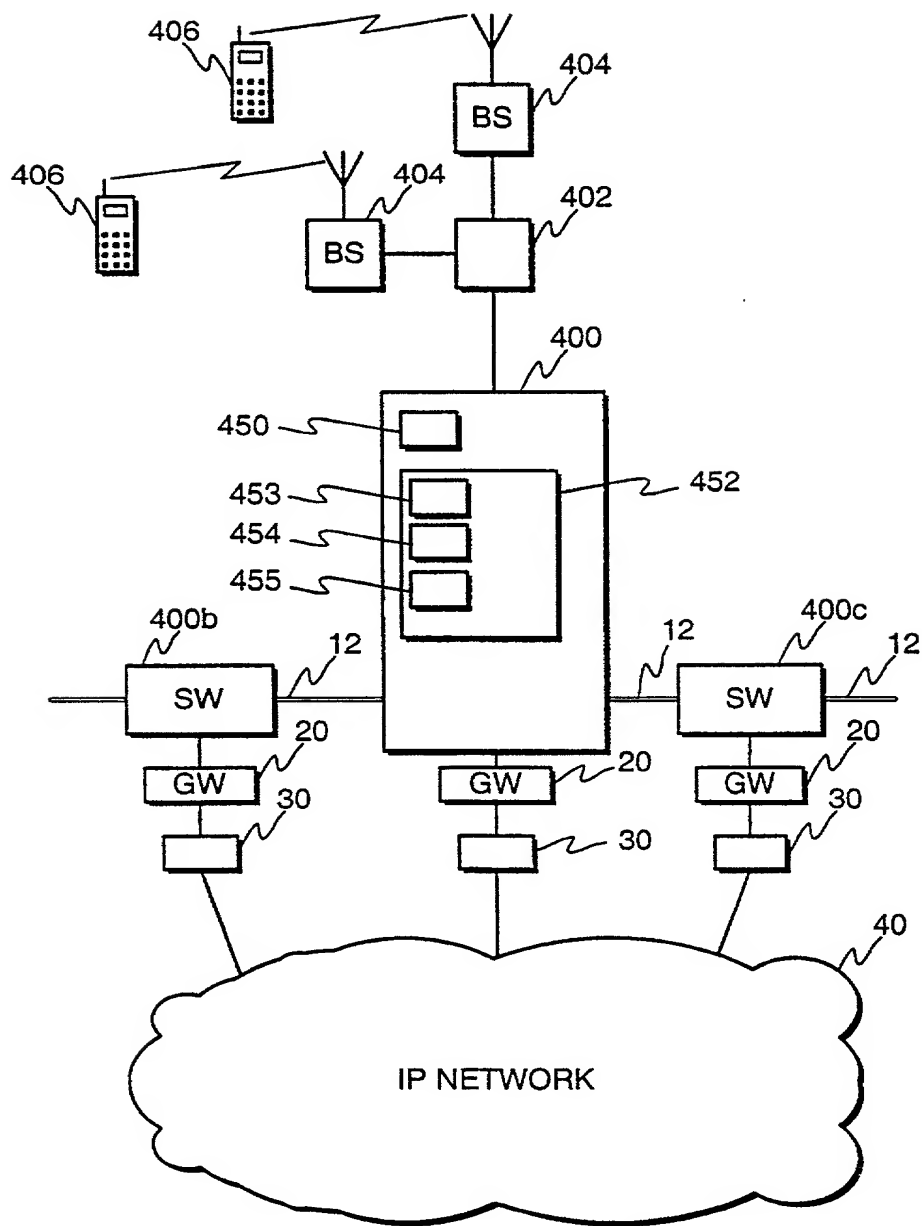


Fig. 5

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CALL SETUP METHOD

the specification of which (check only one item below)

☐ is attached hereto

☐ was filed as United States application

Serial No. _

on _

and was amended

on _ (if applicable).

☒ was filed as PCT international application

Number PCT/FI00/00555

on 21 June 2000

and was amended under PCT Article 19

on _ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

PRIOR FOREIGN/PCT APPLICATIONS AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:



Country (if PCT, indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. 119	
Finland	991413	21 June 1999	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
PCT	PCT/FI00/00555	21 June 2000	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO

Continued Declaration for Patent Application and Power of Attorney (Continued)
 (Includes Reference to PCT International Applications)

Attorney's Docket No.
 4925-19111 S

1	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
2	RESIDENCE / CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
3	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE / COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201 	SIGNATURE OF INVENTOR 202 	SIGNATURE OF INVENTOR 203
DATE 03/21/2002	DATE 03/22/2002	DATE

2006-10-03 09:00:00

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120.

U.S. APPLICATIONS		STATUS (check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)		
PCT/FI00/00555	21 June 2000		X	

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (List name and registration number)

MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD WEISZ, Reg. No. 37,257; VINCENT M. FAZZARI, Reg. No. 26,879; JULIA S. KIM, Reg. No. 36,567; ALFRED FROEBRICH, Reg. No. 38,887; ALFRED H. HEMINGWAY, JR., Reg. No. 26,736; KENT H. CHENG, Reg. No. 33,849; YUNLING REN, Reg. No. 47,019; ROGER S. THOMPSON, Reg. No. 29,594; BRICE FALLER, Reg. No. 29,532; DAVID J. ROSENBLUM, Reg. No. 37,709; TONY CHEN, Reg. No. 44,607; ELI WEISS, Reg. No. 17,765.

Send correspondence to:

Michael C. Stuart
Reg. No. 35,698
Cohen, Pontani, Lieberman & Pavane
551 Fifth Avenue, Suite 1210
New York, New York 10176

Direct Telephone calls to:
(name and telephone number)
Michael C. Stuart
(212) 687-2770

201	FULL NAME OF INVENTOR	FAMILY NAME <u>OLKKONEN</u>	FIRST GIVEN NAME <u>Mikko</u>	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY <u>Inkoo</u>	STATE OR FOREIGN COUNTRY Finland <u>FX</u>	COUNTRY OF CITIZENSHIP Finland
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Tähtelänpolku 3</u>	CITY <u>Inkoo</u>	STATE & ZIP CODE/COUNTRY FIN-10210 Finland
202	FULL NAME OF INVENTOR	FAMILY NAME <u>HARNO</u>	FIRST GIVEN NAME <u>Jarmo</u>	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY <u>Espoo</u>	STATE OR FOREIGN COUNTRY Finland <u>FX</u>	COUNTRY OF CITIZENSHIP Finland
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Hiidenportti 12 B</u>	CITY <u>Espoo</u>	STATE & ZIP CODE/COUNTRY FIN-02750 Finland